

Description

The USB3.2 Gen1 protocol is limited to 3 meters. Our USB3.2 Gen1 amplifier allows you to extend the USB3 signal to 11 meters maximum.

We propose a standard range of amplifiers from 3 meters up to 8 meters (see How to order).

Using the USB3 amplifier selection guide below, please consider all your requirements and contact us.

Main features

Main characteristics:

- An 8 meters USB3 amplifier can be connected with a 3 meters cordset to achieve a maximum lenght of 11 meters.
- USB3 cordset is provided by Amphenol.
- Shock, vibration and traction resistance
- Improved EMI protection
- Mate with our USB3FTV™ series (MIL-DTL-38999 series III type) with anti-decoupling device - Shell size 15


Environmental protection:

- Sealing (when mated): IP68 (temporary immersion)
- Salt spray:
 - 48 h Aluminum shell with Nickel plating ✓
 - 500 h Aluminum shell with Black zinc nickel plating
 - 500 h Aluminum shell with Olive drab cadmium plating
 - 500 h Aluminum shell with Tin-zinc plating 🔨 🥯
 - 500 h Marine bronze shell >
- Humidity: 21 days, 43°C, 98% humidity
- Temperature range: 40°C / + 85°C

✓: RoHS compliant

USB3 Amplifier wiring diagram



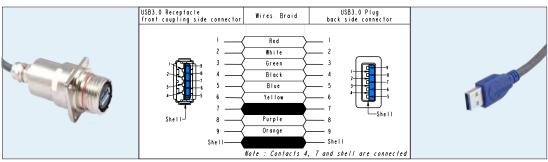

Markets & Applications













Available configurations

Square flange receptacle - Shell type 2 - 4 mounting holes

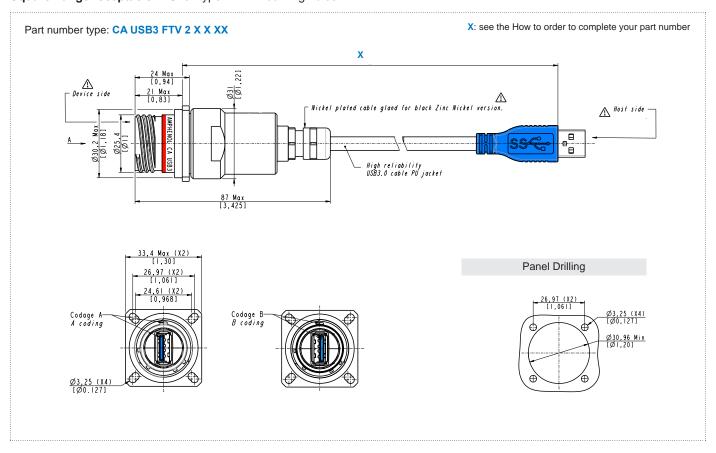


Jam nut receptacle - Shell type 7 - Hexagonal nut mounting

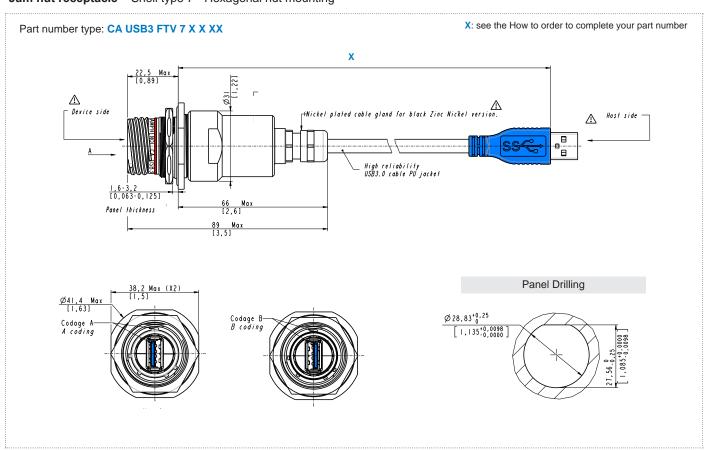

USB3 Amplifier selection guide

Define your own solution by selecting options in the scheme below

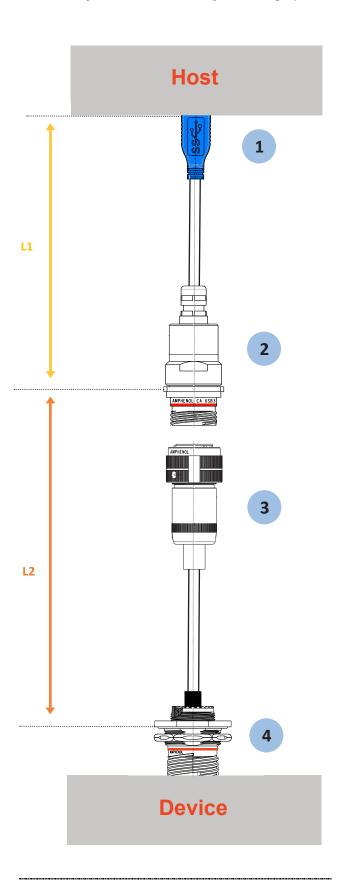

Define the type of USB3 cable end:

- Standard USB3 Type A plug or USB3FTV plug.

If you want a USB3 FTV plug:

- Nickel plated, Olive drab cadmium plated or Black zinc nickel plated, Tin zinc plated or Marine bronze shell.
- Protective cap or not.
- <u>Define the lenght of L1:</u>
 - Standard lenghts: 3 m, 6 m, 8 m.
- Define the USB3 amplifier shell:
 - Square flange or jam nut receptacle.
 - Nickel plated, Olive drab cadmium plated or Black zinc nickel plated, Tin zinc plated or Marine bronze shell.
 - Protective cap or not.
- Define the type of plug:
 - Standard USB3 Type A plug or USB3FTV plug.

If you want a USB3 FTV plug:

- Nickel plated, Olive drab cadmium plated or Black zinc nickel plated, Tin zinc plated or Marine bronze shell.
- Protective cap or not.
- L2 Define the lenght of L2:
 - Standard lenghts: 1 m, 2 m, 3 m.
- Define the type of USB3 cable end:
 - Standard USB3 Type A plug or USB3 FTV plug.

If you want a USB3 FTV plug:

- Nickel plated, Olive drab cadmium plated or Black zinc nickel plated, Tin zinc plated or Marine bronze shell.
- Protective cap or not.

If you want a USB3 FTV receptacle:


- Square flange or jam nut receptacle.
- Female USB3 Type A or soldered cable.
- Transversally sealed for soldered cable termination or not.
- Backshell or not.
- Nickel plated, Olive drab cadmium plated or Black zinc nickel plated, Tin zinc plated or Marine bronze shell.
- Protective cap or not.






Standard protective cap

This protective cap provides you with a permanent sealing.

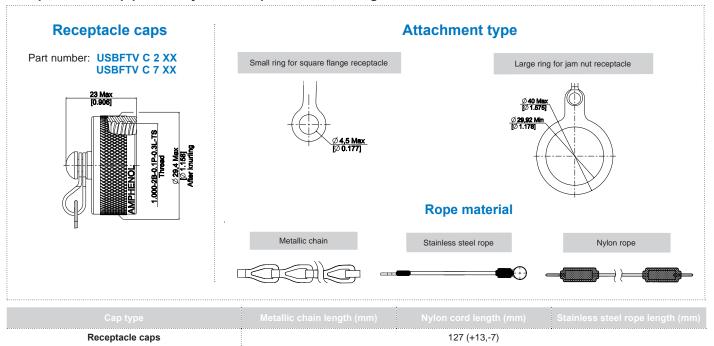

Metallic Self-Closing Caps

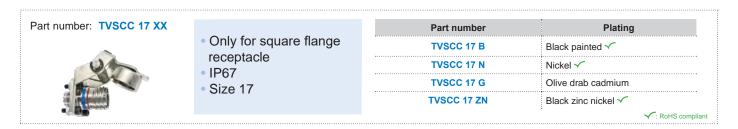

Cybersecurity solutions

Amphenol Socapex has developed a dedicated solution to prevent unauthorized access to critical interconnexions. Caplocks & Pluglocks in composite material are designed to meet this need.

Suitable part numbers for your USB3 connectors:





How to order - Amplifier

1.	2.	3.	4.	5.
Series	Shell type	Coding (for plug with cordset only)	Material and platings	Cordset length (for plug with cordset only)
CA USB3F TV	2	Α	G	30

1. Series	
CA USB3F TV	USB3.2 Gen1 Field Series copper amplifier (USB3-A)
2. Shell type	
• 2	Square flange receptacle
7	Jam nut receptacle
3. Coding (for plu	g with cordset only)
• A	Coding A
В	Coding B

	Shell material	Shell plating
G		Olive drab cadmium
N	Aluminum	Nickel 🗸
ZN		Black zinc nickel ✓
TZ		Tin Zinc ✓ 👜
BZ	Bronze ✓	

5. Cordset le	ength with plug USB	3 type A	
	Meters	Inch	
30	3 m	118,11	
40	4 m	157,48	
50	5 m	196,85	
60	6 m	236,22	
70	7 m	275,59	
● 80	8 m	314,96	

• Standard configurations available from stock in our distributors network.

Examples:

Part number	Description
CA USB3F TV 7 A ZN 80	USB3.2 Gen1 Field Series copper amplifier (USB3-A), jam nut recepatcle, coding A, black zinc nickel plating, 8-meters cordset
CA USB3F TV 2 B G 60	USB3.2 Gen1 Field Series copper amplifier (USB3-A), square flange recepatcle, coding B, olive drab cadmium plating, 6-meters cordset
CA USB3F TV 2 A TZ 30	USB3.2 Gen1 Field Series copper amplifier (USB3-A), square flange recepatcle, coding A, tin zinc plating, 3-meters cordset

How to order - Accessories

Standard protective cap

1.	2.	3.	4.
Series	Connector type	Rope type	Shells material and finish
USBFTVC	7	M	G

1. Series	
USBFTVC	USBFTV standard protective cap
2. Connector ty	уре
2	Square flange receptacle
7	Jam nut receptacle

Metallic chain
Stainless Steel rope - Transparent teflon jacket
Stainless Steel rope - Black teflon jacket for ZN finish

Black zinc nickel plating 🗸

✓: RoHS compliant

ΖN







Discover a selection of products compatible with your USB3 FTV Amplifier

USB3F TV



- Shell size 15
- USB specification 3.0
- Shock, vibration and traction resistant
- Sealed against fluids and dusts (IP68)
- Tri Start Thread coupling mechanism (MIL-DTL-38999 III type) with anti-decoupling device.



USB3 Cordsets



- USB3.2 Gen 1
- Up to 3 m max in lenght
- Reinforced PUR Jacket
- Halogen free
- Double shielding

USB3 Key FTV



- Reinforced memory key
- USB3.2 Gen 1 max transfer 5 Gb/s
- Available capabilities: 32, 64, 128 and 256 Gb







