




DIMENSIONS

in millimeters / in inches

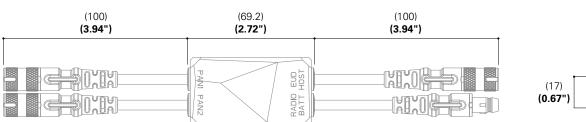

(38) (1.5") (0.67")

KEY SPECIFICATIONS

EUD/ HOST	VBATT output power	Unregulated VBATT 10-20 V DC, up to 5 A
	USB output power	Power delivery, charge up to 1.5 A
PAN 1/2	VBATT output power	Unregulated VBATT 10-20 V DC, up to 5 A
	USB output power	Regulated 5 V DC, up to 2 A per port
RADIO/ BATT	VBATT input power	Unregulated VBATT 10-20 V DC, up to 5 A
	USB input power	5 V DC IN power supply
Communication protocol		USB 2.0
Fault mode protection		Overcurrent, overvoltage and back-power

Housing material	Aluminum
Weight	125 g (4.2 oz)
Pull force – pigtail cables	>100 lbs. (>450 N)
Environmental validation	as per MIL-STD-810G
EMI / EMC validation	as per MIL-STD-461G
Compliance	CE, FCC, UKCA, RoHS and REACH

SLIM MOLLE CLIP INTEGRATION











Vertical Part number 226075

Horizontal Part number 226411

Belt Part number 226412

OPTIONS AND ACCESSORIES

Colors & soft caps



TAN (w/ soft caps) Part number 144100



BLACK (w/ soft caps) Part number 144102



TAN (w/o soft caps) Part number 144098



BLACK (w/o soft caps) Part number 144101

Explore high-performance connectivity solutions fischerconnectors.com

